



**THE  
MAT  
KING**



740 West End Avenue; Suite 1  
New York, NY 10025  
(646) 998-4208 • Fax: (646) 998-4073  
www.thematking.com  
Email: [information@thematking.com](mailto:information@thematking.com)




## **MFG-II TAPCON**



- No layout or hole spotting required
- Fast, easy installation
- Removable
- Use with masonry drill bit for maximum holding power
- Recommended embedment 1" - 1 3/4"

**Use in:** Concrete, block, brick  
**Use with:** No other fastener needed  
**Made of:** Case hardened carbon steel,  
with RIE coating 406 process for corrosive environments  
**Size:** 3/16" x 1 1/4"

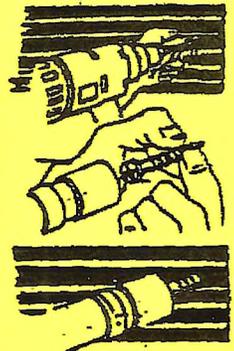

**Instructions for use:** Using a 3/16" drill bit, drill a hole a minimum of 1/4" deeper than the maximum embedment depth of the anchor (minimum anchor embedment should be 1"). Place the anchor through tread into the pilot hole and drive in with Phillips bit.